

AT 310 ALUMINIUM ENTRANCE DOOR

AT310 PROFILED OUTSIDE AND INSIDE



Outside view



Inside view

Thermal insulation
(in W/m^2K)



U_D as low as 0.81

Sound reduction
(in dB)



up to 33

Security



up to RC 2

Design style


home pure

home soft

ambiente

Characteristics

- Concealed door hinges (optional)
- Attachment glass frame inside

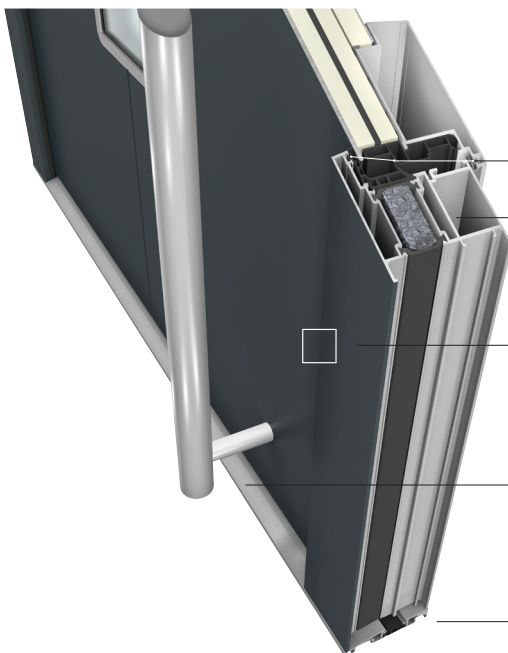

3 gasket levels


3-chamber frame profile and foam insulation core for very high thermal insulation

Profiled design inside and outside

Low threshold thermally broken

Construction depth 93 mm

Sections

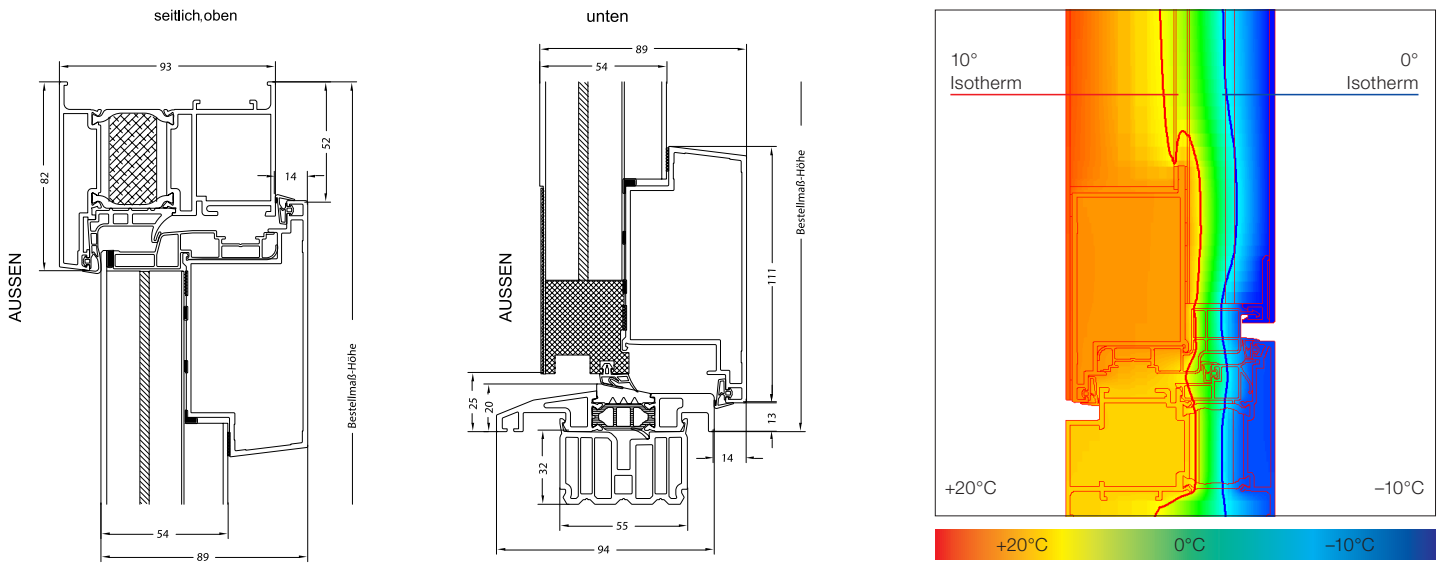

Door models



AT310-17-039



AT310-17-040



AT310-17-042



AT310-17-034



-17-035



AT310-17-037

Internorm Window UK

Unit D, Colindale Business Park
2-10 Carlisle Road, NW9 0HN, London
Tel.: +44 (0) 208 205 9991

Email: office@internorm.co.uk