







KV 350 UPVC-ALUMINIUM WINDOW WITH INTEGRATED BLINDS

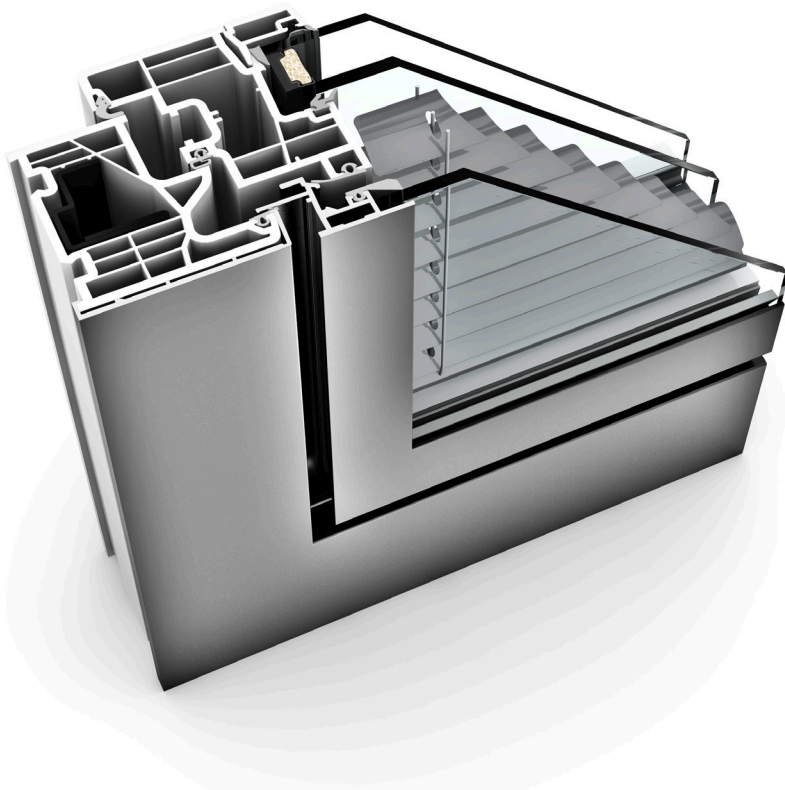

PROPERTIES


| | |
|--|---|
|  | Thermal insulation U_w as low as 0.79 W/(m ² K) |
|  | Sound reduction up to 44 dB |
|  | Security RC1N, RC2 |
|  | Locking concealed |
|  | Construction depth 74 mm |

I-tec Glazing

I-tec Shading




Experience KV 350 interactively now

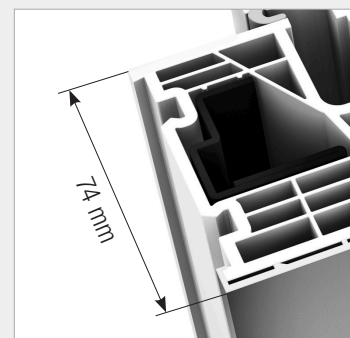

KV 350

The modern and narrow window with integrated blinds, KV 350, features four main advantages. As well as the best sound reduction and thermal insulation, sun and privacy protection are also integrated in the window directly between the glass panes. This helps with cleaning - the blind is protected by glass panes from wind, bad weather and dirt. Sun protection is now also available in refurbishments or on facades, even if roller shutters are not permitted. I-tec shading works fully self-sufficiently and offers many other useful functions.

Sections

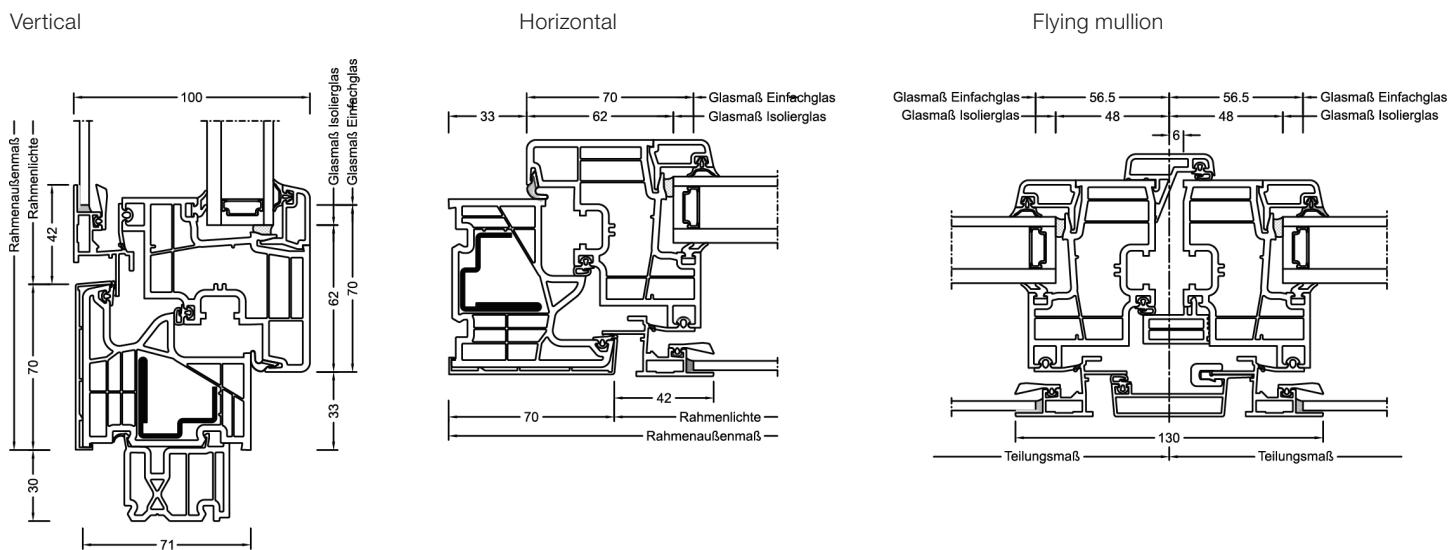

Values

| Glass setup | Glass code | Spacer | Coating | Ug Insul.glass | Uf | Psi | Uw | Thermal certificate | Rw | C | Ctr | Sound certificate |
|----------------------------------|------------|--------|---------|-------------------|-----|-------|------|---------------------|-----|----|-----|-------------------|
| 4 // 6/18Ar/b4 | 2KU | Iso | light | 1.1 | 1.1 | 0.028 | 1.0 | YES | 40 | -2 | -9 | YES |
| | | Alu | light | 1.1 | 1.1 | 0.047 | 1.1 | YES | 40 | -2 | -9 | YES |
| 6 // 6/18Ar/b4 | 2KU | Iso | light | 1.1 | 1.1 | 0.028 | 1.0 | YES | 42 | -3 | -9 | YES |
| | | Alu | light | 1.1 | 1.1 | 0.047 | 1.1 | YES | 42 | -3 | -9 | YES |
| 4 // 3bESG/10Kr/ 2TVG/10Kr/b3ESG | 37F | Iso | light | 0.6 | 1.1 | 0.033 | 0.79 | YES | 38* | | | no |
| 6 // 3bESG/10Kr/ 2TVG/10Kr/b3ESG | 37F | Iso | light | 0.6 | 1.1 | 0.033 | 0.79 | YES | 40* | | | no |